

LIGHTWEIGHT MODULARITY. LEGENDARY DURABILITY.

The Radiant762 is the pinnacle of lightweight modularity. Combining the use of Cobalt 6 baffles in the main body and grade 5 Titanium baffles in the module means not only is this can lightweight but it also has the durability to be pushed to the limits.



TOP FEATURES



Accuracy Proven

We've sent thousands of rounds through our designs to ensure exactitude. Our vetting process gives our suppressors a proven accuracy and provides you with a repeatable zero shift when attaching/detaching your suppressor.



ADAPT™ Modular Technology

Now you don't have to choose between a short rifle suppressor and a long one. With ADAPT™ Modules you get two lengths with one tax stamp. So you can have a shorter and lighter suppressor in seconds compared to months.



Dual Taper Locking System™

Our quick detach mounts feature 2 tapers. The front taper provides a concentric lock up and protects the threads from carbon build up. The rear taper prevents the suppressor from loosening during firing.



Lightweight High Strength Titanium

The Radiant762 is so strong that it is full-auto rated, surpassing US SOCOM standards - while also being magnum rated for calibers up to 300RUM; with no barrel length restrictions.






RADIANT762

WITH ADAPT™ MODULAR TECHNOLOGY



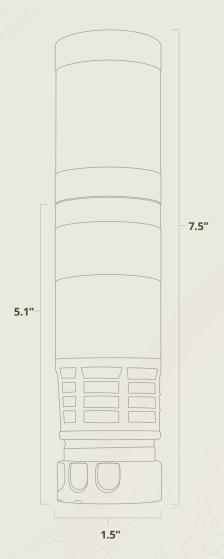

SPECIFICATIONS

CALIBER: 7.62mm rated to .300 RUM; Full-Auto Rated

DIAMETER: 1.5"

LENGTH:

Standard Configuration: 7.5" Short Configuration: 5.1"

WEIGHT:

Standard Configuration: 12.5oz Short Con iguration: 9.4oz

MATERIALS

Ba les: Cobalt 6 and Grade 5 Titanium

Tube: Grade 5 Titanium

Mount: Grade 5 Titanium

Finish: High Temp Cerakote®

FEATURES

Lightweight High Strength Titanium

ADAPT™ Modular Technology Accuracy

Comes Standard

Dual Taper Locking System

Strategically Placed Engraving

Interchangeable End Caps

Full-Auto Rated

INCLUDES

7.62 M2 Brake (5/8×24 Thread Pitch)

7.62 Ti Front Cap

Radiant762 Suppressor

ADAPT Module

Operator's Manual

Dual Taper Lock™ Mounting Instructions

Rugged Suppressors Sticker

R Logo Sticker

ACCESSORIES

MUZZLE DEVICES:

M2 Brake - 5/8×24

R3 Flash Mitigation System – 7.62

R3L Flash Mitigation System - 5/8×24

R3 Flash Mitigation System – 1/2×28 (5.56)

3 Port Brake

2 Port Brake - 1/2×28 (5.56)

END CAPS:

5.56 Front Cap

Flash Hider Front Cap

Ti Front Cap – 7.62mm





